

CUZCO



FABRICATION
FRANÇAISE

SÉRIE 713PP - C45° Porte d'entrée pleine

La gamme de profilés aluminium Cuzco® 713PP est conçue pour la fabrication de portes d'entrée pleines 1 vantail, à rupture de pont thermique (par barrettes polyamides de 38mm) et à hautes performances énergétiques.

Compatible avec les panneaux de porte Euradif et les ouvrants monobloc Solobloc, la porte pleine Cuzco® Série 713PP autorise l'ajout d'une imposte fixe en verre (de 24 à 52mm) afin d'optimiser l'apport lumineux.

DESIGN DROIT



DORMANT

Tubulaire d'une épaisseur de 70mm avec barrettes polyamides de 38mm

OUVRANT

- Tubulaire d'une épaisseur de 75,8mm intégré dans les panneaux de porte Euradif
- Monobloc à intégrer sur le dormant pour les panneaux de porte Solobloc / Isosta

VERROUILLAGE

- Possibilité de serrure à clé multipoints, béquille relevable ou automatique
- Fermetures pour gorge de 16mm avec possibilité d'utiliser des paumelles ou des fiches

ASSEMBLAGE

Assemblage en C45° au moyen d'équerres à pions, à sertir + collage

POINTS FORTS

- Performances thermiques supérieures à la RT 2012
- Serrure multipoints automatique ou à relevage
- Seuil PMR pour accès des personnes à mobilité réduite
- Compatible avec les panneaux de porte Euradif et Solobloc
- Disponible dans toutes les couleurs exclusives Profils Systèmes : Terra Cigala®, Maohé®, Eclats Métalliques®, Profils Color®, Terre de Matières®
- Tenue de la teinte garantie jusqu'à 25 ans
- Fabrication Française
- Émissions COV : Classement A+

PERFORMANCES

Thermique :

- **Ud = jusqu'à 1.2 W/m²K / Up=0.6**

Porte 1 vantail dimensions CE pour une surface inférieure à 3.6m²


Étanchéité :

- **Résultats AEV : A*4 - E*9A - V*C2**

Porte 1 vantail avec panneau Solobloc

COUPE

Porte Pleine Solobloc - Echelle 1/20

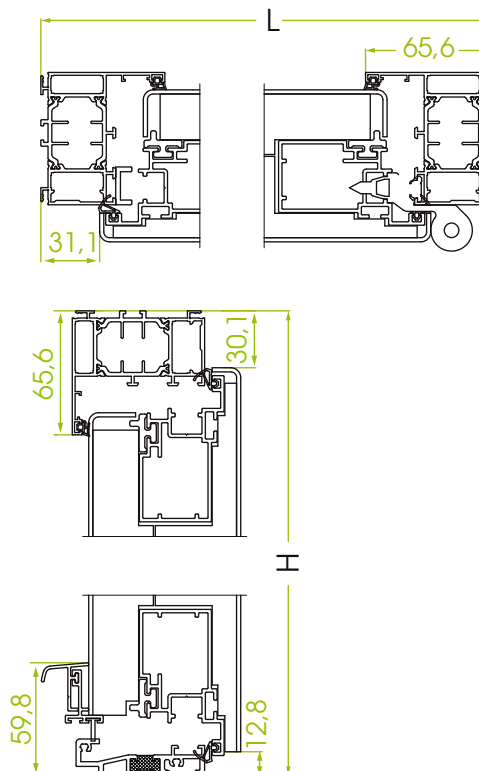

Profils
SYSTEMES

Choisissez votre profil

CUZCO



713PP SERIE

Full entrance door



The Cuzco® 713PP range of aluminium profiles is designed for the manufacture of single leaf full entrance doors, with thermal bridge break (using 38 mm polyamide strips) and High Energy Performance.

Compatible with Euradif doors panels and Solobloc single-piece doors, the Cuzco® 713PP Series full door allows for the addition of a fixed glass transom (24 - 52mm) to optimise incoming light.

STRAIGHT  DESIGN

FIXED FRAME

Hollow section 70mm thick with 38 mm polyamide strips

DOOR

- Hollow section 75.8 mm thick integrated into Euradif door panels
- Single-piece to be integrated onto the fixed frame for Solobloc / Isosta door panels

LOCKING

- Possibility of multi-point lock with key, lift-lock or automatic handle
- Locks for 16mm grooves with fixed and two-piece hinges possible

HANGING

C45° hanging using clipped + glued brackets

FEATURES

- Thermal performance above RT 2012
- Automatic or lift-lock multi-point locking system
- Reduced sill for access for people with reduced mobility
- Compatible with Euradif and Solobloc door panels
- Available in all Profils Systèmes' exclusive colours : Terra Cigala®, Maohé®, Eclats Métalliques®, Profils Color®, Terre de Matières®
- Colour tint guaranteed up to 25 years
- Made in France
- VOC emissions: Class A+

MADE IN FRANCE



EFFICIENCY

Thermal:

- Ud = up to 1.2 W/m2K | Up=0.6
1 leaf door, EC dimensions for a surface area of less than 3.6m²

Water resistance:

- Air, Water, Wind results: Air*4 - Water*9A - Wind*C2
Single leaf door with Solobloc panel



www.profil-systemes.com

Parc Activités Massane - 10 rue Alfred Sauvy
34 670 Baillargues - France / Tél : +33 4 67 87 67 87

Une société du groupe Corialis

Profils
SYSTEMES